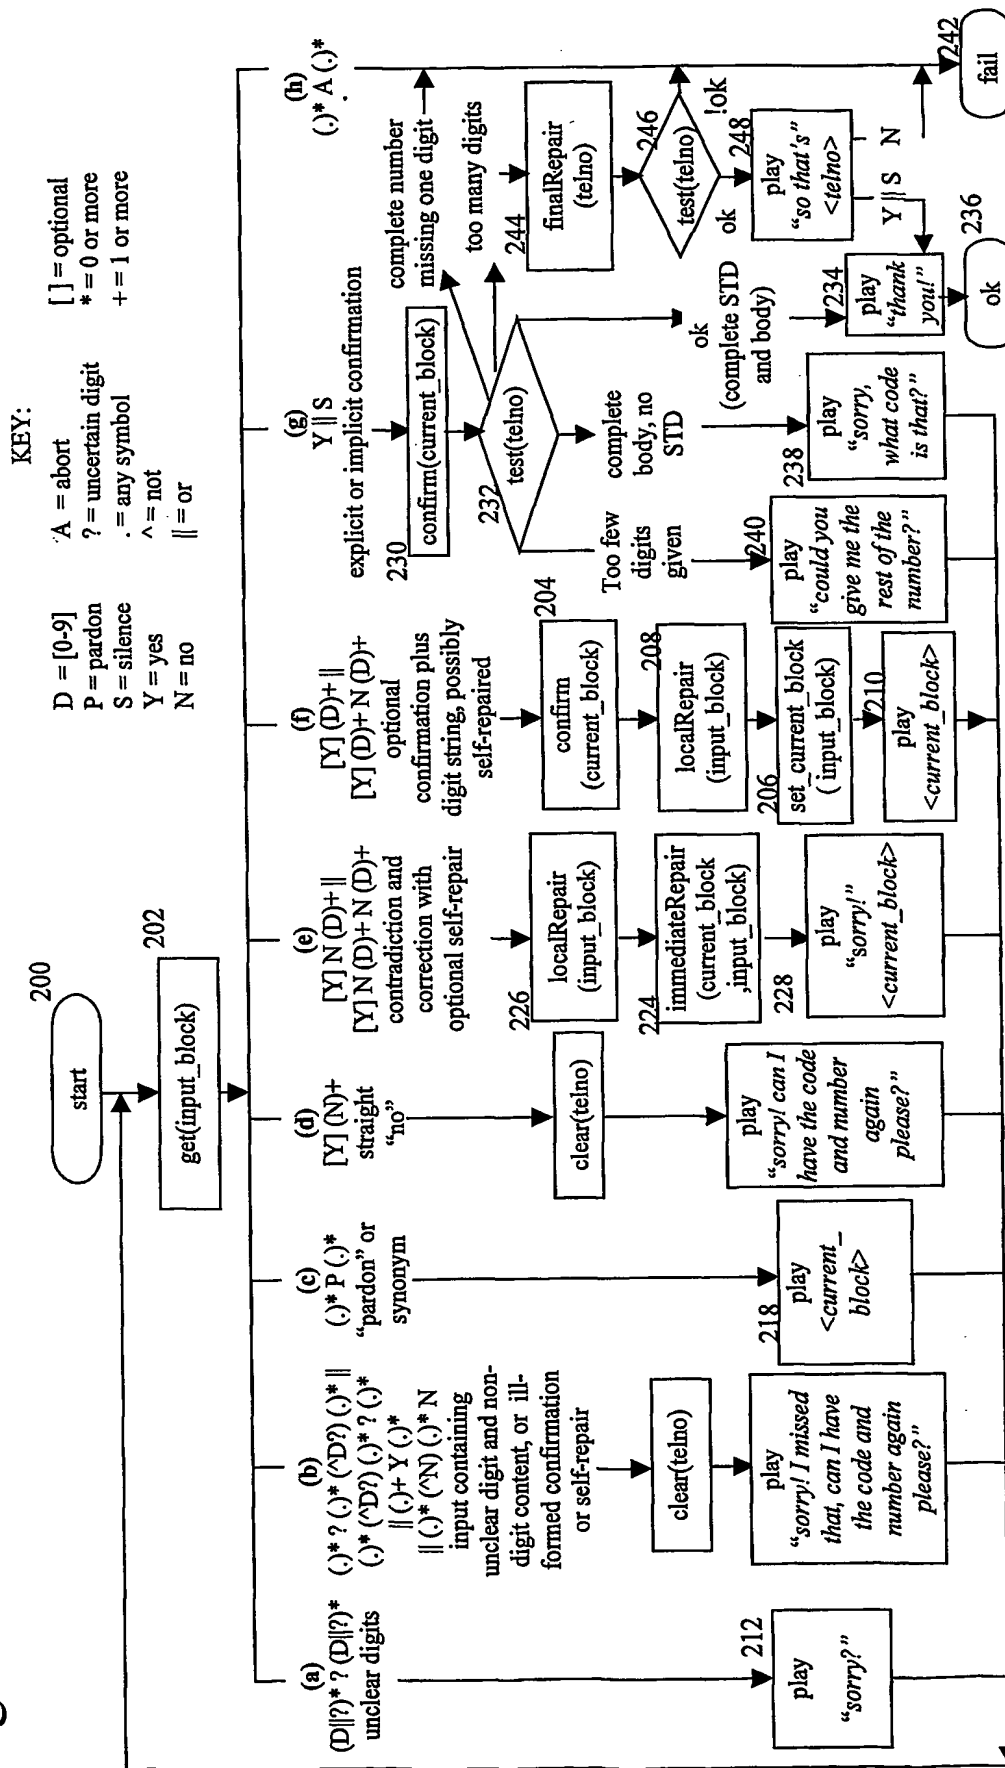


FIGURE 1

Figure 2



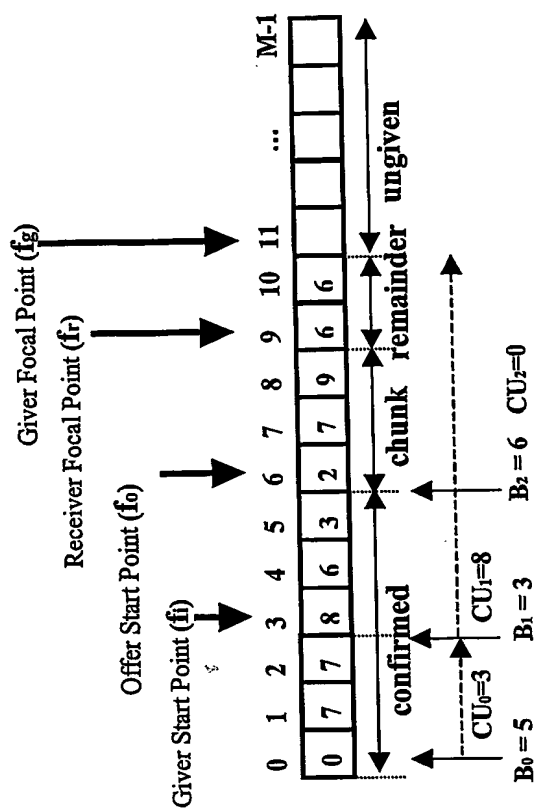


Figure 5. Telpo buffer extended for chunked confirmation and correction units.

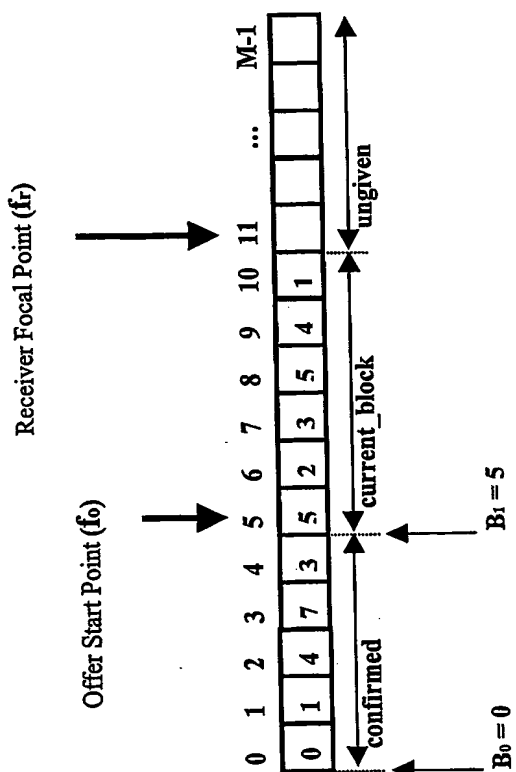


Figure 3. Simple telno buffer with block boundaries.

Figure 4

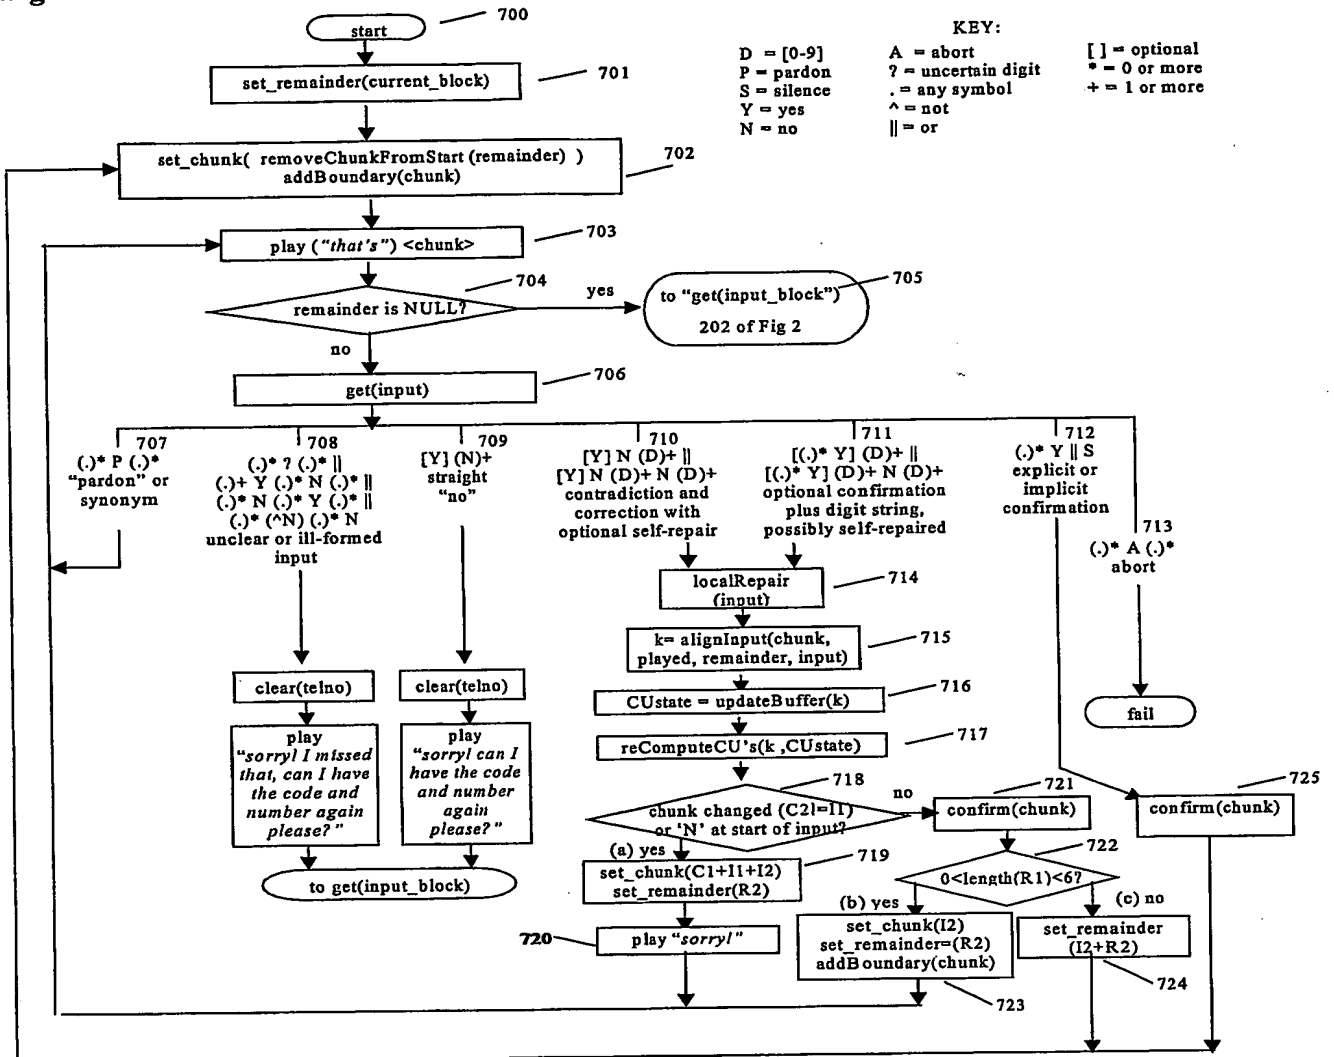


Figure 6

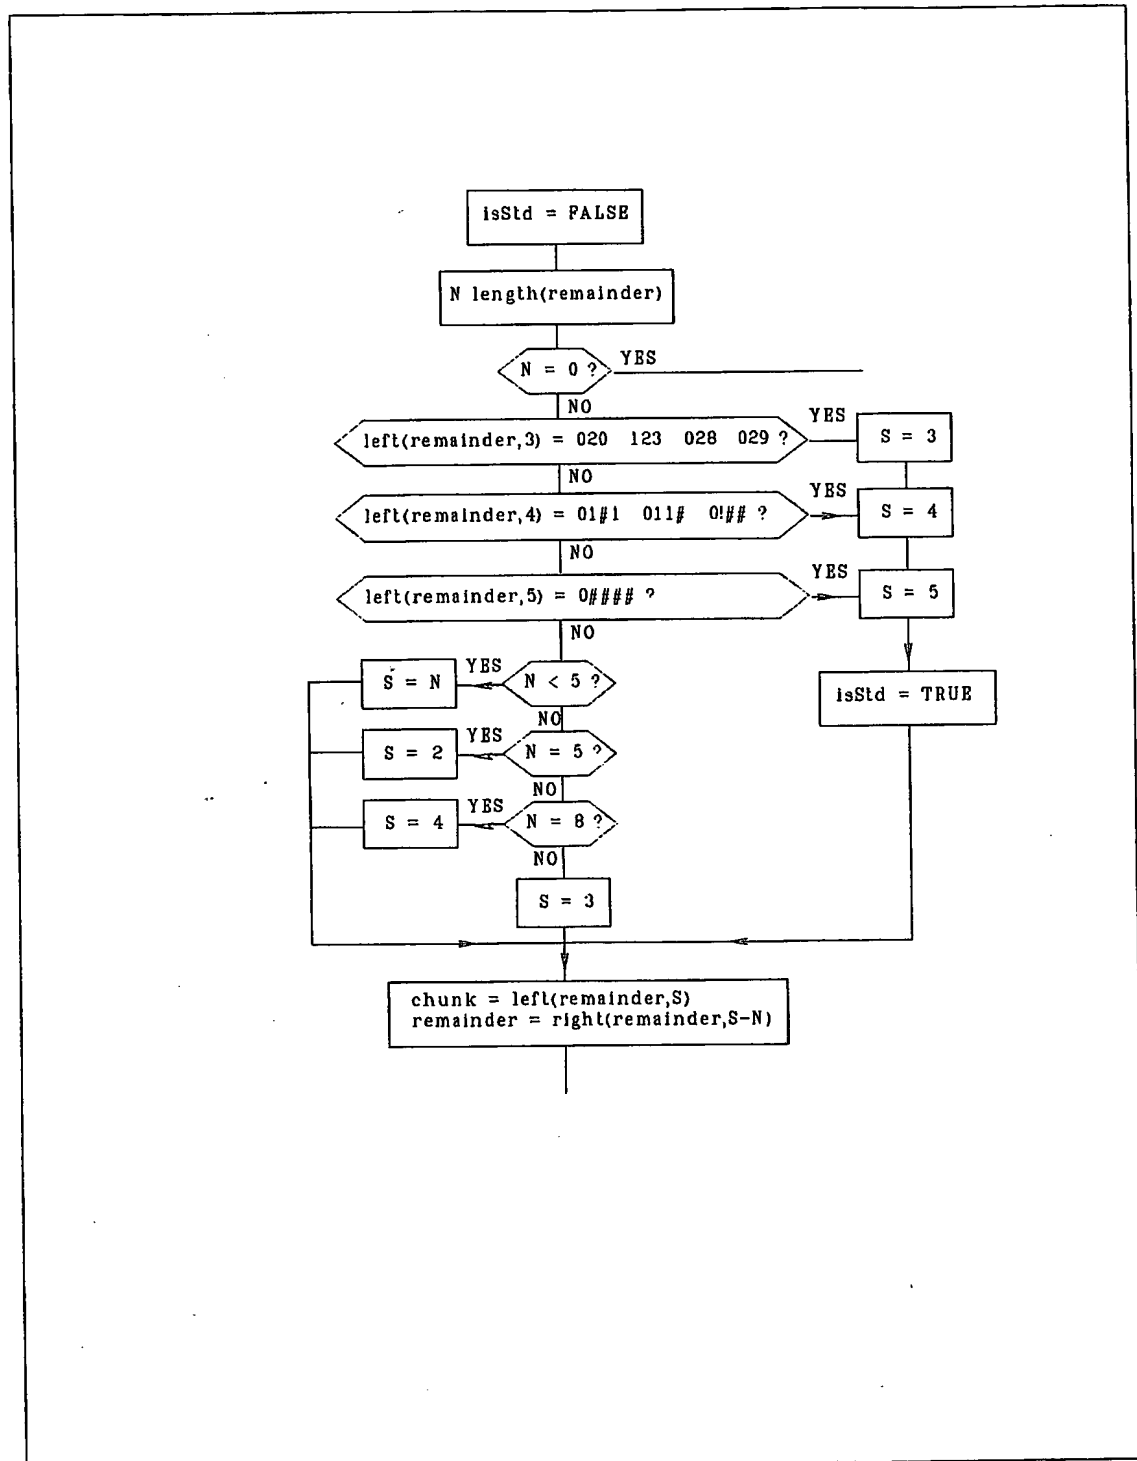


Figure 7

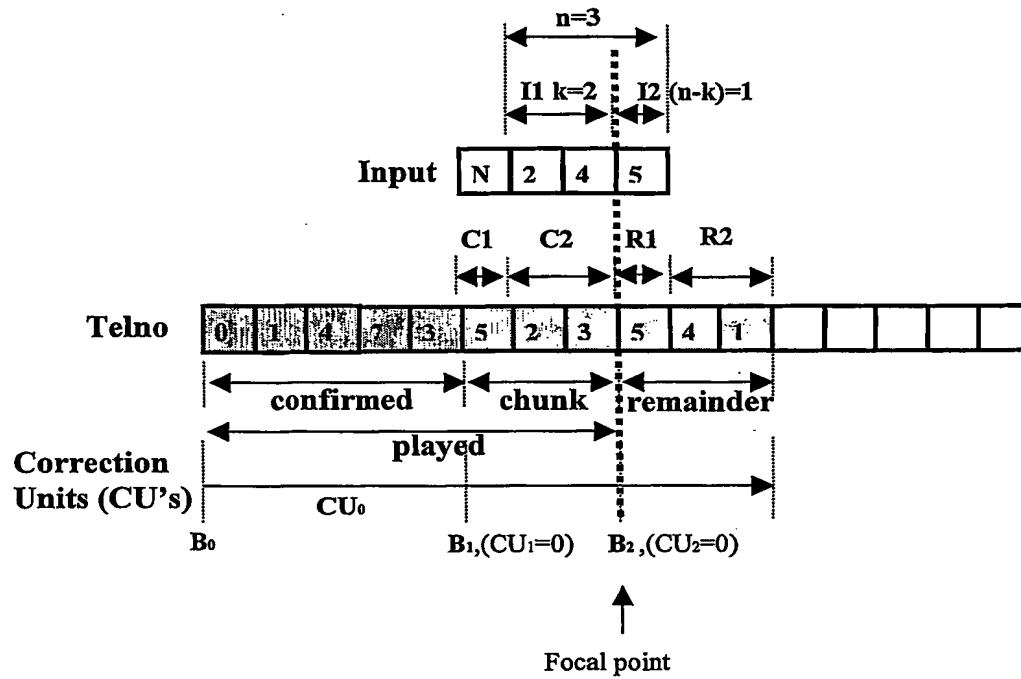


Figure 8

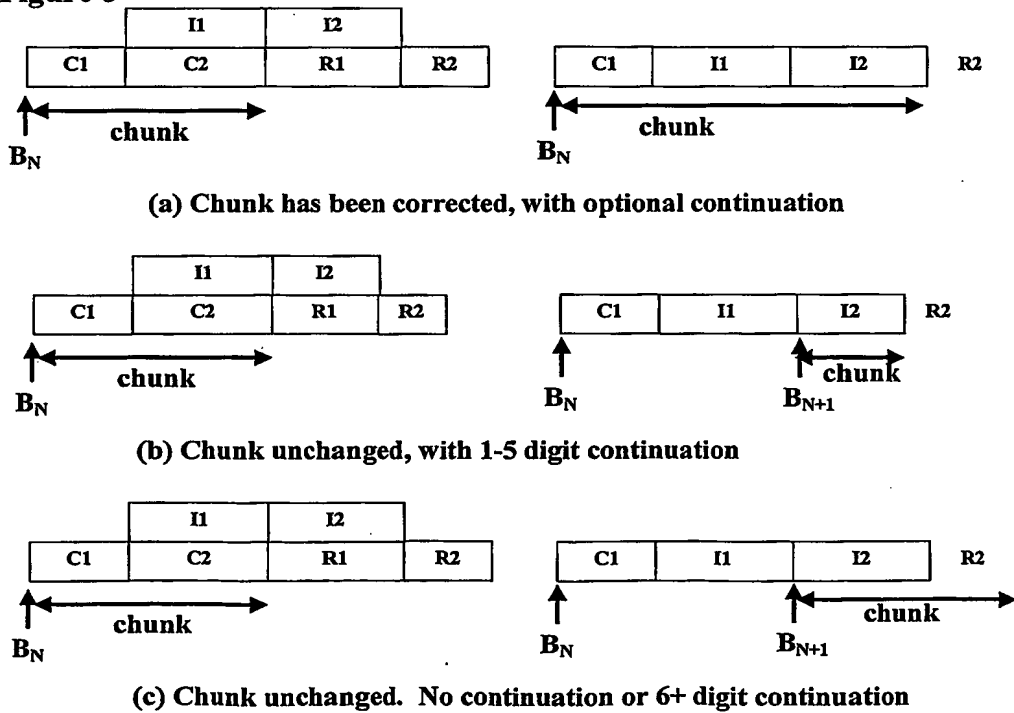
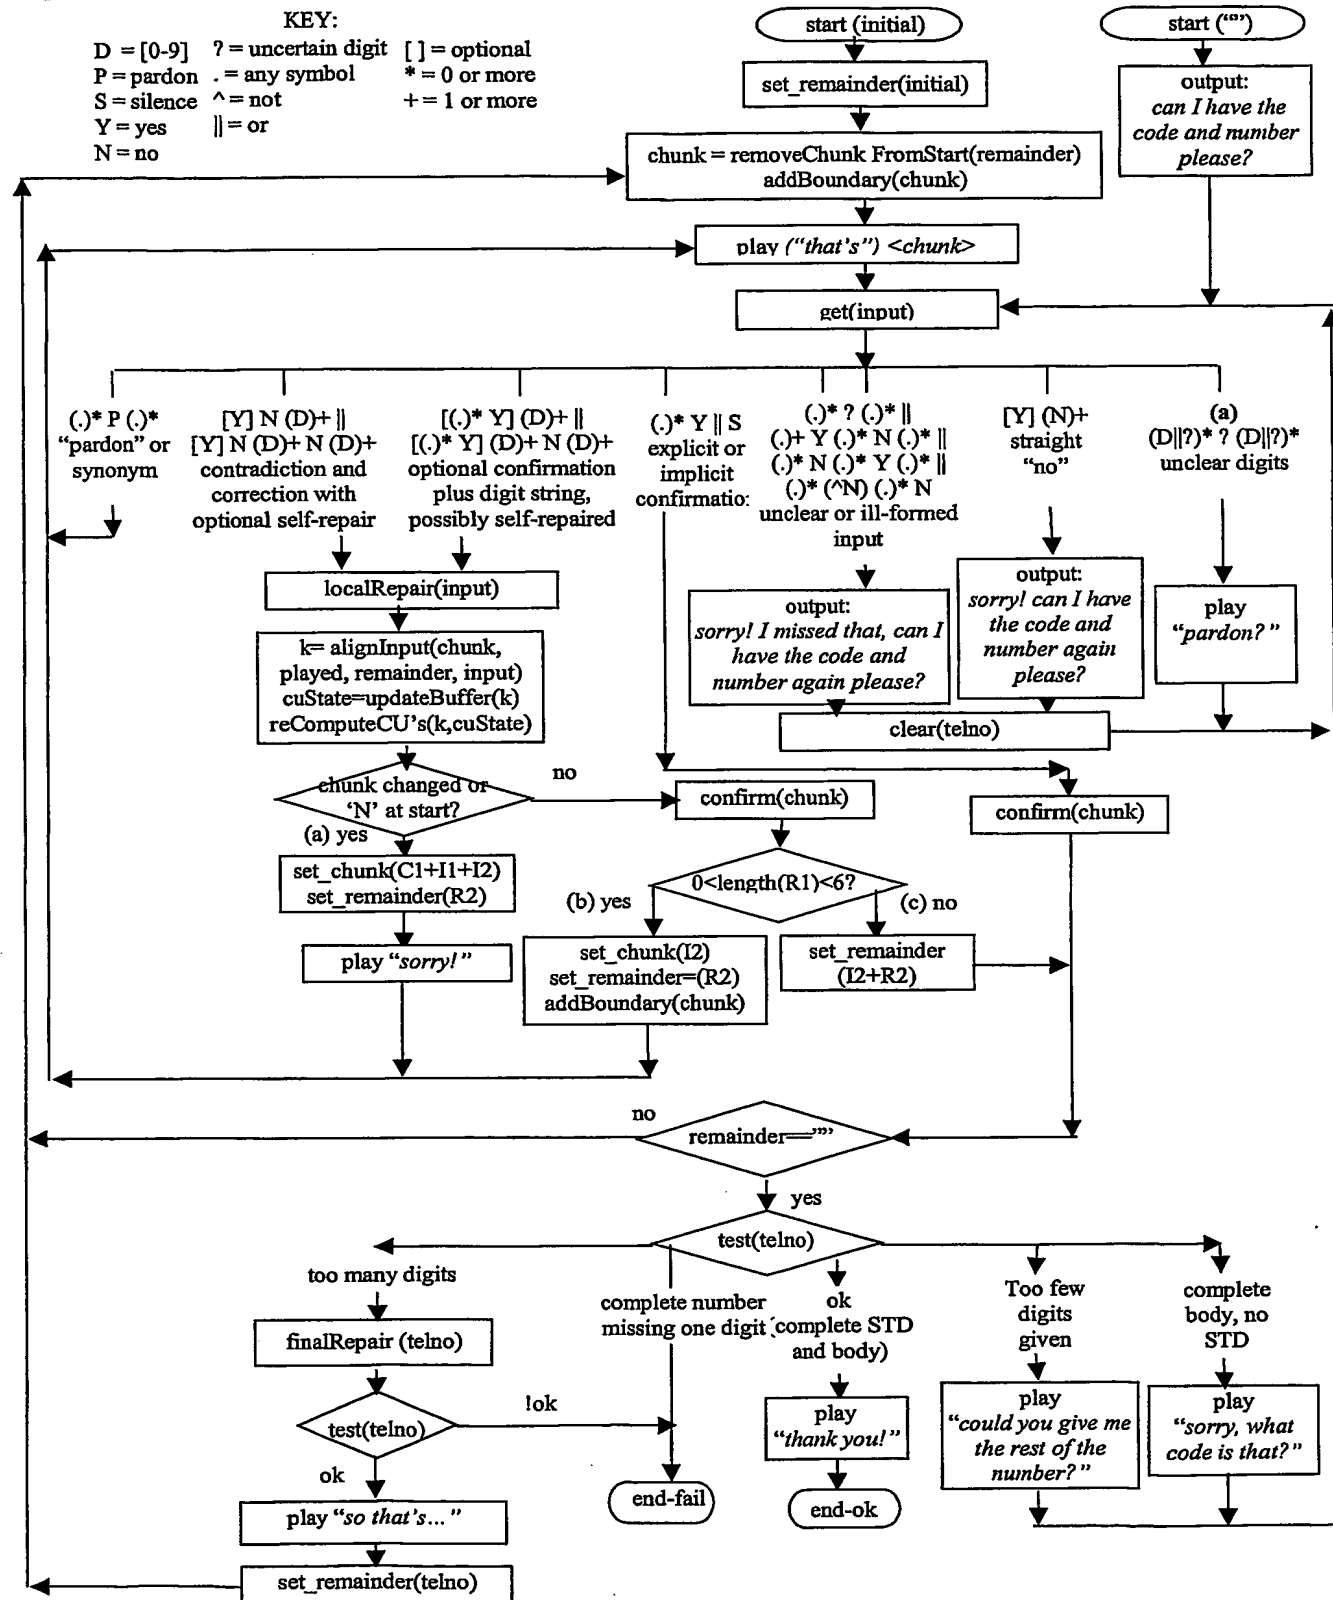


Figure 9



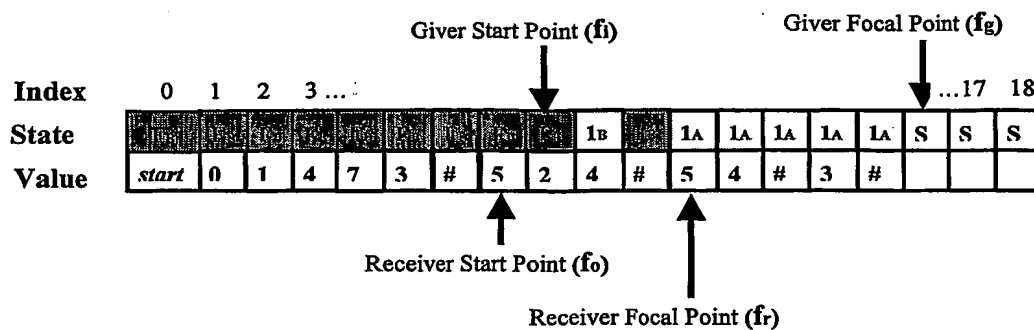


Figure 10

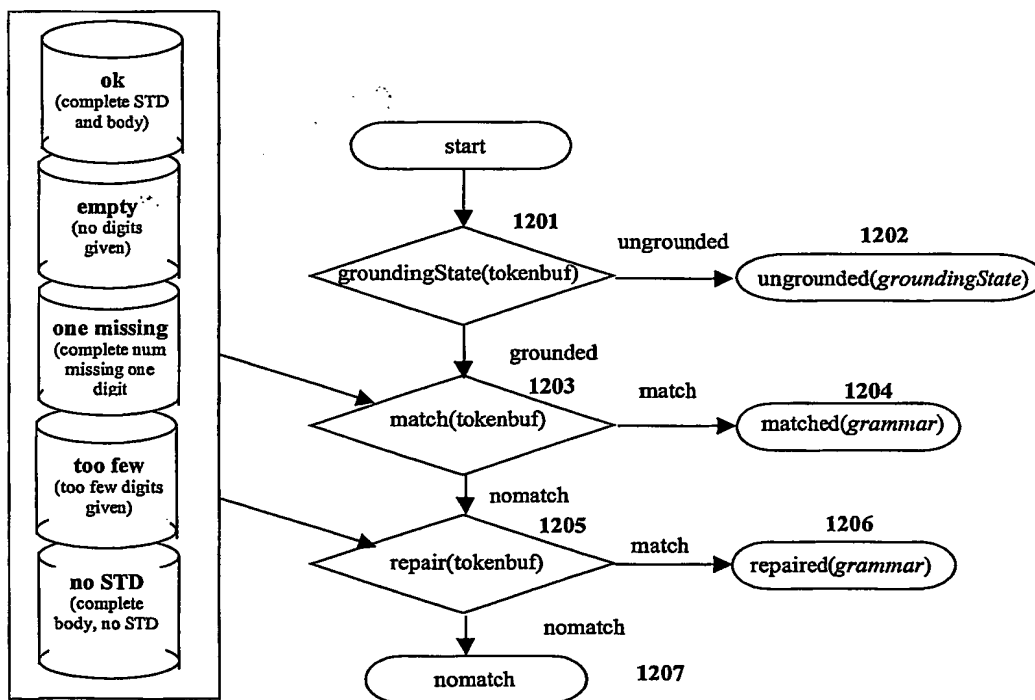
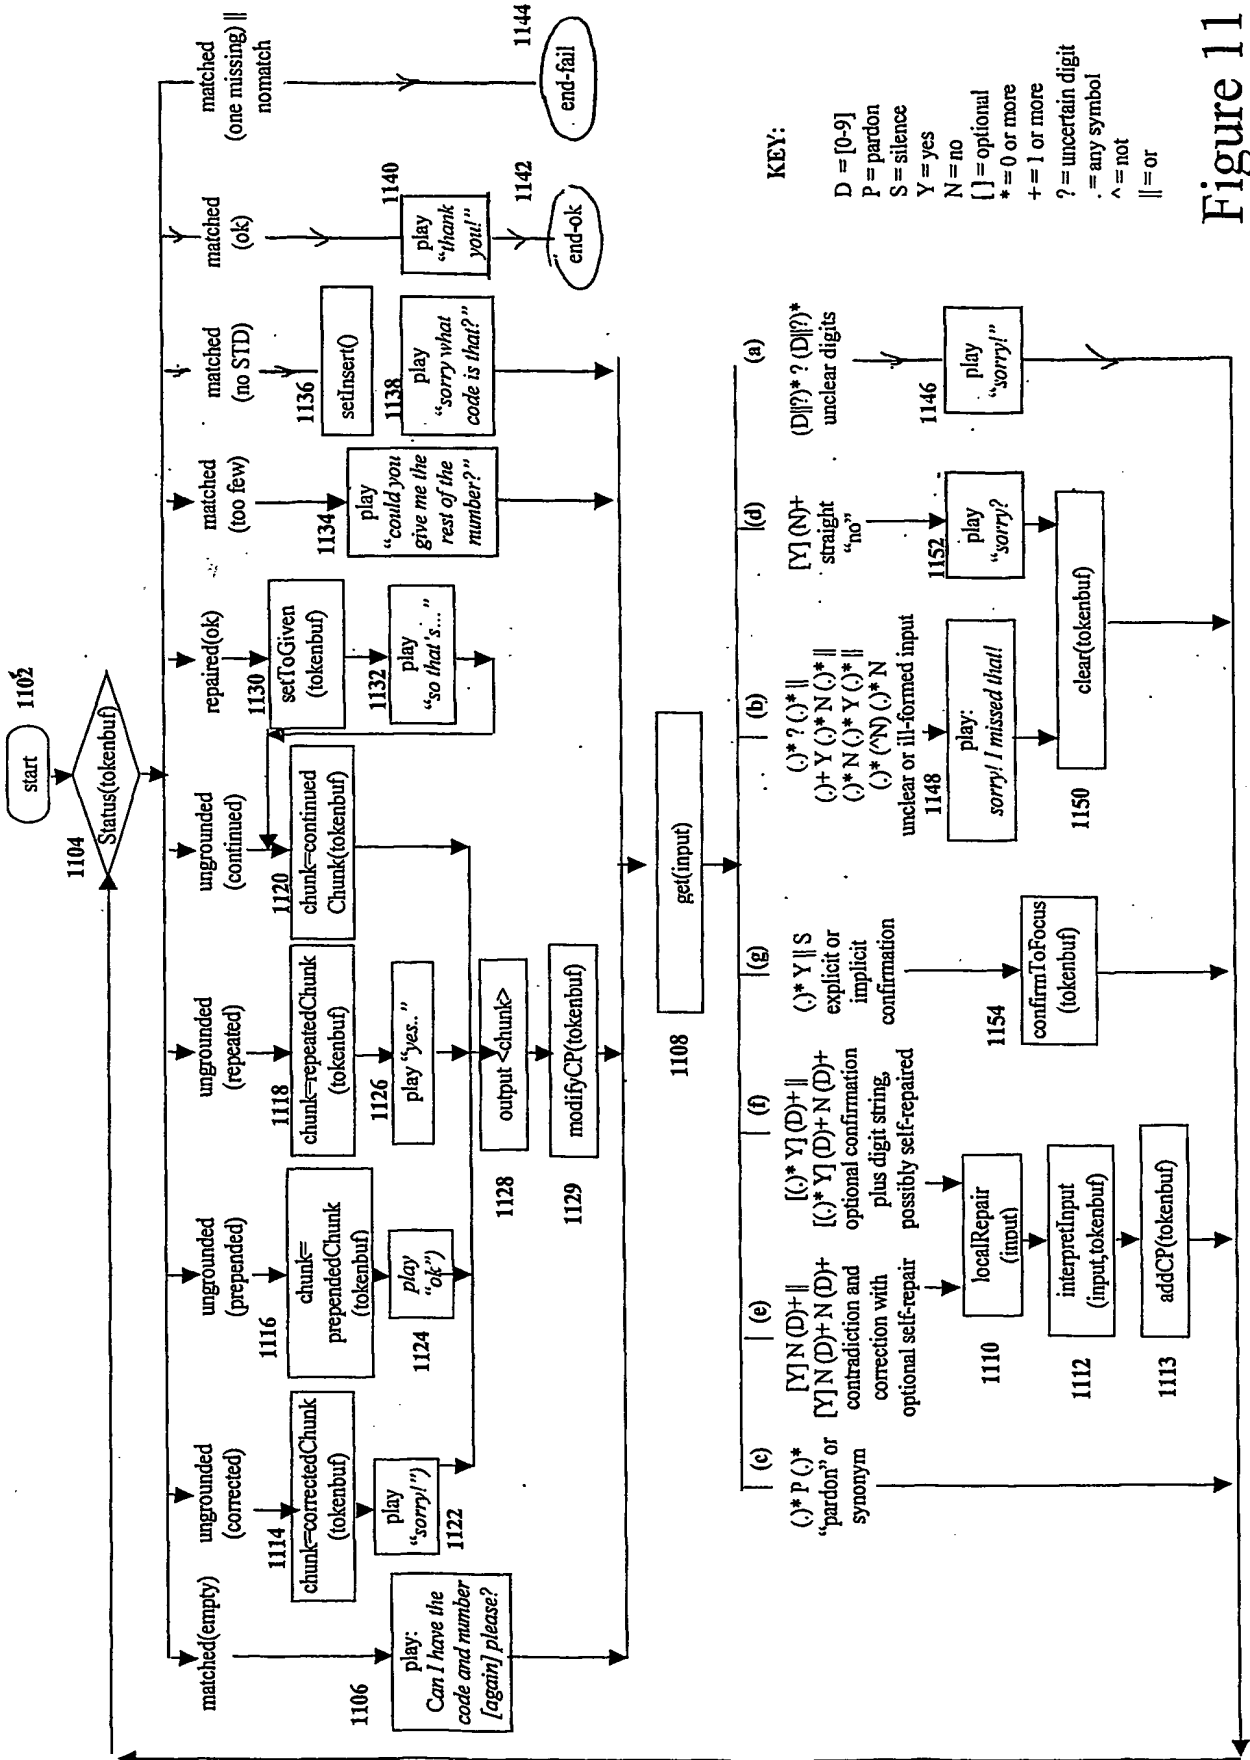


Figure 12



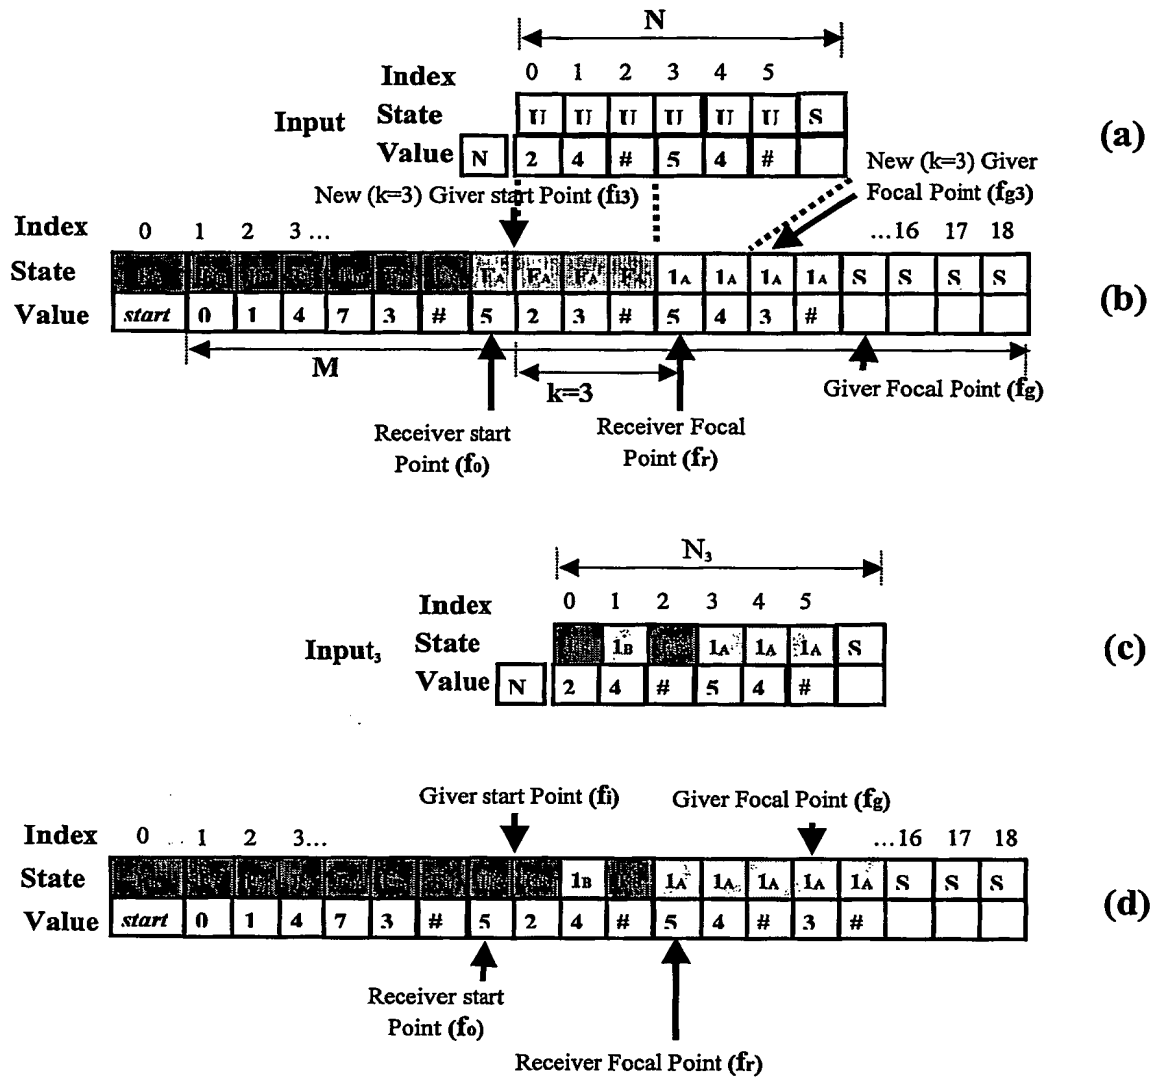


Figure 13

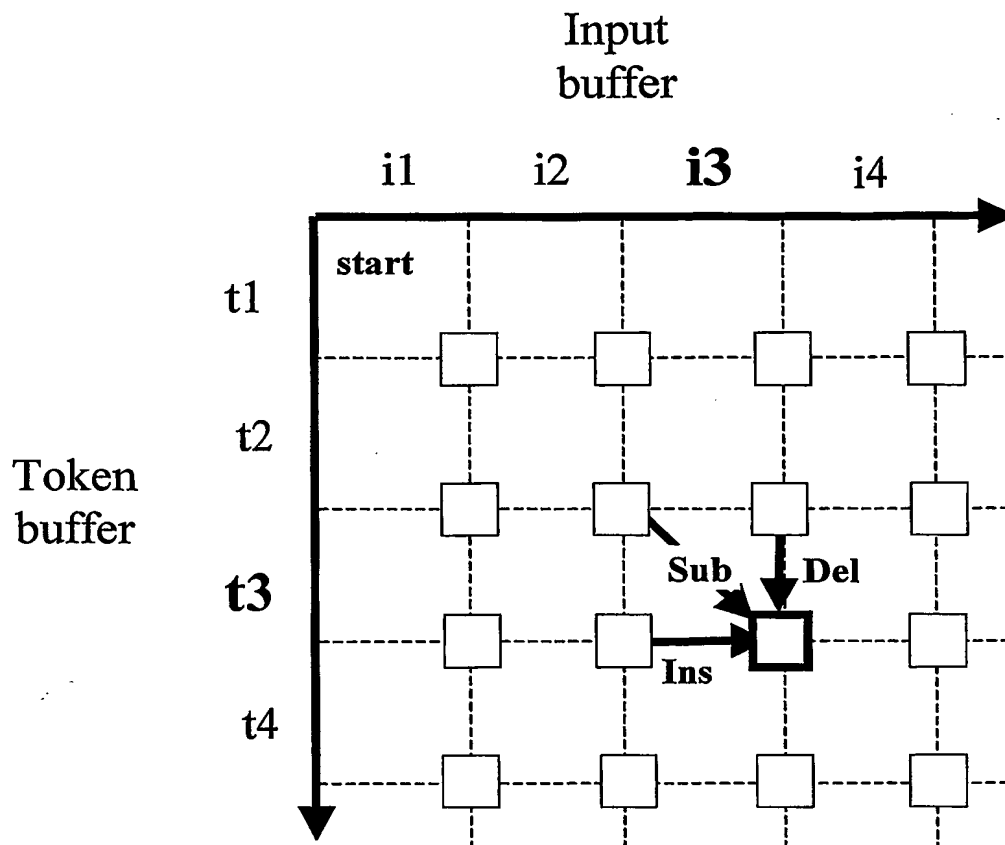


Figure 14.

Use of context during DP alignment. Tokens **t3** and **i3** form the context for the bold cost calculation – i.e. deletion of **t3**, insertion of **i3**, or substitution of **t3** by **i3**.

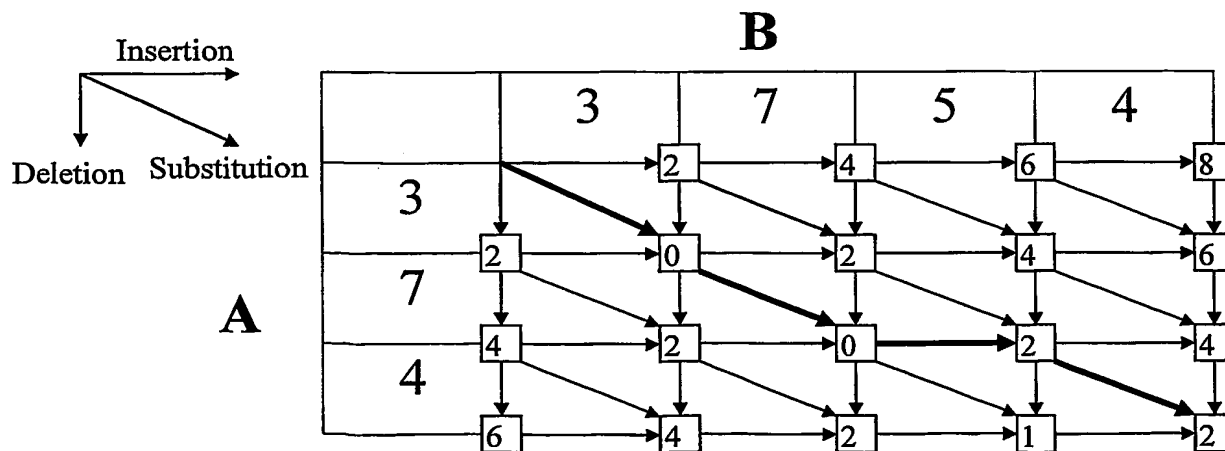


Figure 16

